


Connect Fast Fiber SC/APC

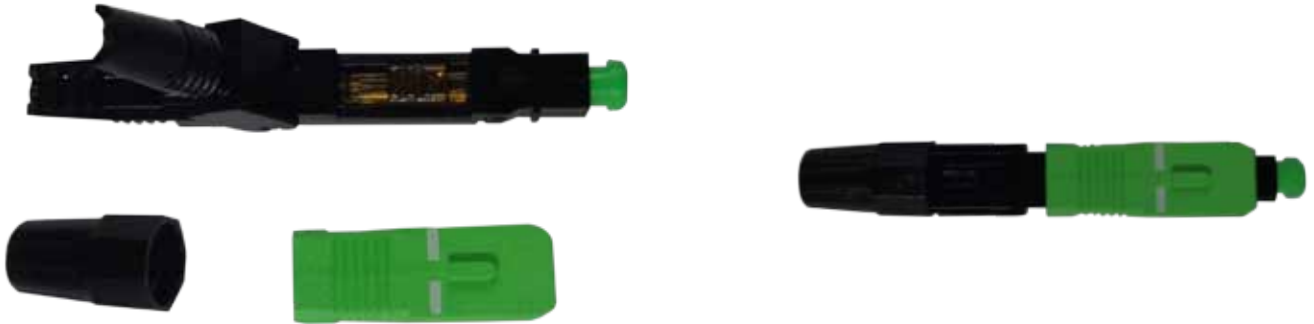


DESCRIPTION

- Cost effective
- Widely and simply to be used
- Interchangeability
- Low insertion loss value
- No splicer needed, perfect connections
- Doesn't require epoxy
- Length: 60mm
- Compatible with G.652D and G.657A fiber


SPECIFICATIONS

Insertion Loss	$\leq 0.3\text{dB}(1310\text{nm}\&1550\text{nm})$
Return Loss	$\geq 55\text{dB}$
Fiber	900 μ 2.0*3.0 bow-type drop cables
Temperature Variation	-0.5dB(-40~+75°C)
Operating Temperature	-40~+75°C
Reusable	≥ 3
Re-inserts of the minimum connector	200 times
Tension test	900 μ - 2N min
	3mm - 40N min

DRAW

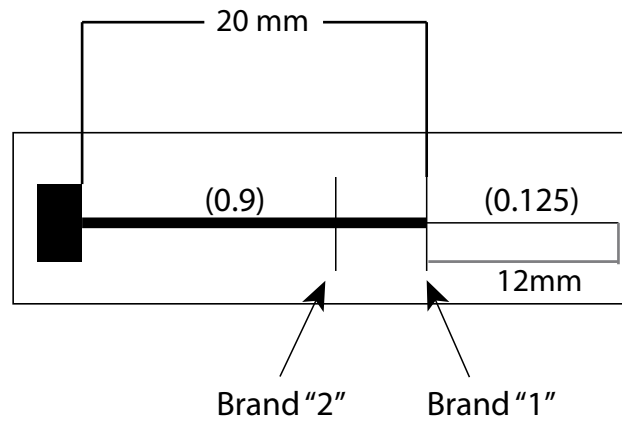

The connector kit incorporates a polished fiber section of the factory with a mechanical splice and the body of the connector

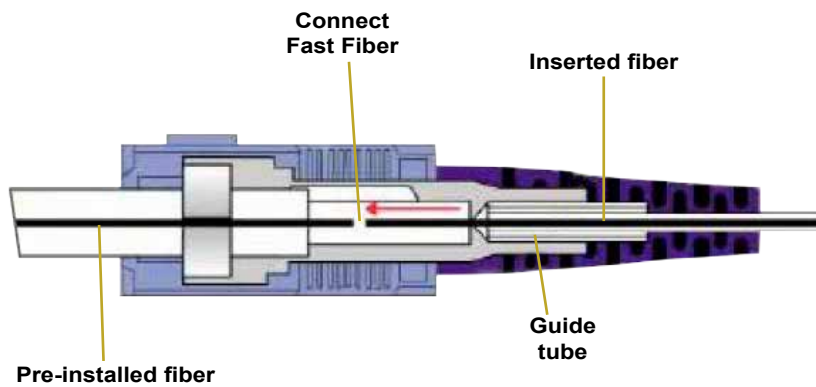

ORDERING INFORMATION

P/N	DESCRIPTION
CFO-4117	Connect Fast Fiber SC/APC