

LIQUID TIGHT CONNECTOR STRAIGHT TYPE




DESCRIPTION

Insulated straight connectors are used on flexible metallic liquid tight conduits and Type B flexible non metallic liquid tight conduits to positively bond conduits to boxes or enclosures in both wet and damp locations. Straight connectors are designed to slip on to the conduit quickly and to grip the conduit jacket, speeding up installation while ensuring a strong, liquid tight seal that decreases the risk of pullouts. All components of these connectors can be easily disassembled and reused. Additionally, the included sealing washers provide liquid tight seals when connectors are terminated in threadless openings. The heavy duty locknuts included with every liquid tight connector ensures the continuity of the grounding. Connectors are Zinc Die Cast for excellent corrosion protection in damp locations.

SPECIFICATIONS

- Material: Zinc Die Cast
- IP64
- Size: 3/4"-1/2"

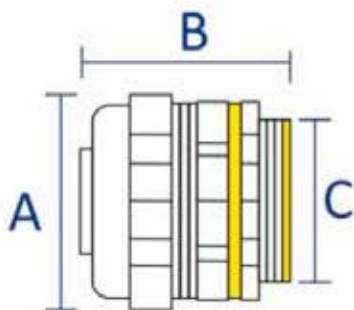

Diameter Ø	Size		
	A(mm)	B(mm)	C(mm)
1/2"	33,0	31,1	20,3
3/4"	38,4	32,8	25,5

ORDER INFORMATION

P/N	Description
CFS-0112	Liquid Tight Connector Straight Type 1/2"
CFS-0134	Liquid Tight Connector Straight Type 3/4"