


## PRODUCT INFORMATION

- Elegance look, profound technical, precise dimension, with modern taste, add value to your projects.
- Easy to fix concentrated distribution unit into frame.
- Vented front door.
- One double open vented rear door.
- Install caster and support feet at the same time.
- Strong structure with 1000Kg max loading.
- Wire path on the top and bottom can be closed, and wire holes dimension can be changed as request.
- Optional bottom seat for stable stand, bottom cold ventilation and prevent rats.
- Side door and rear/front door can be taken down easily.
- 2 vertical cable management are included for cabinets from 800mm width.
- Cabinet for telecommunication systems

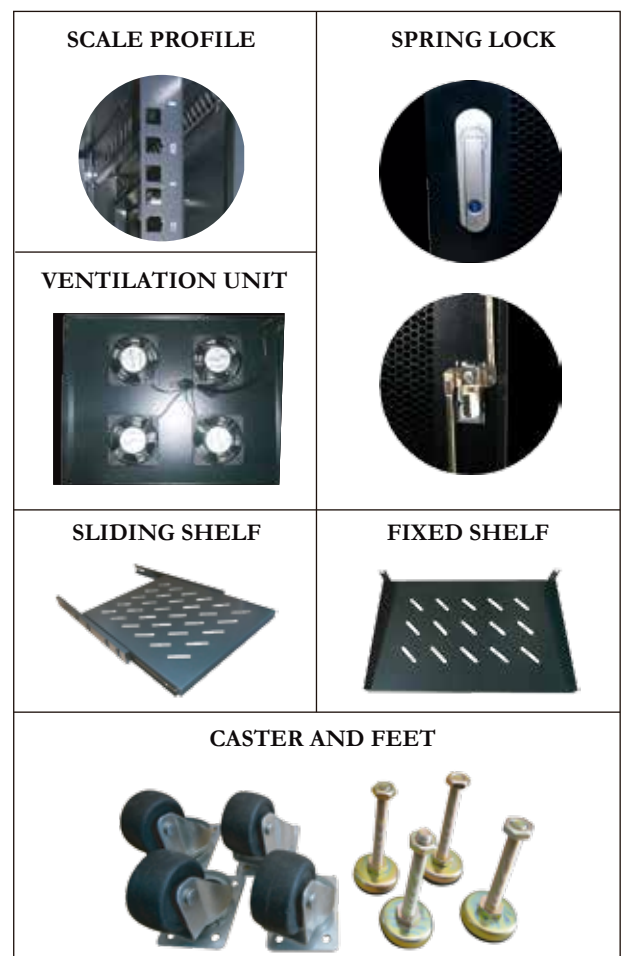

## PRODUCT CHARACTERISTIC

- Static loading 1760 lb (800 kg)
- Width 24" (600mm), 32" (800mm)
- Depth 24" (600mm), 32" (800mm), 38" (960mm), 39" (1000mm)
- Grove cover can be install and uninstall quickly and easily to maintain
- 19" can be updated to 23", 25", 27" (as demand)
- Sliding shelf
- Fixed shelf


**Material:** SPCC quality cold rolled steel

**Thickness:** Square hole strips 0.08" (2mm), others 0.05" (1.2mm)

**Surface finish:** Degrease, acid pickling, rust prevention and parkerizing pure water cleaning, static electricity plastic painting

**STANDARD**

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41491; PART 1; DIN41494; PART7, GB/T3047.2-92 Standard;  
Compatible with 19" internacional standard and metrical standard & ETSI standard

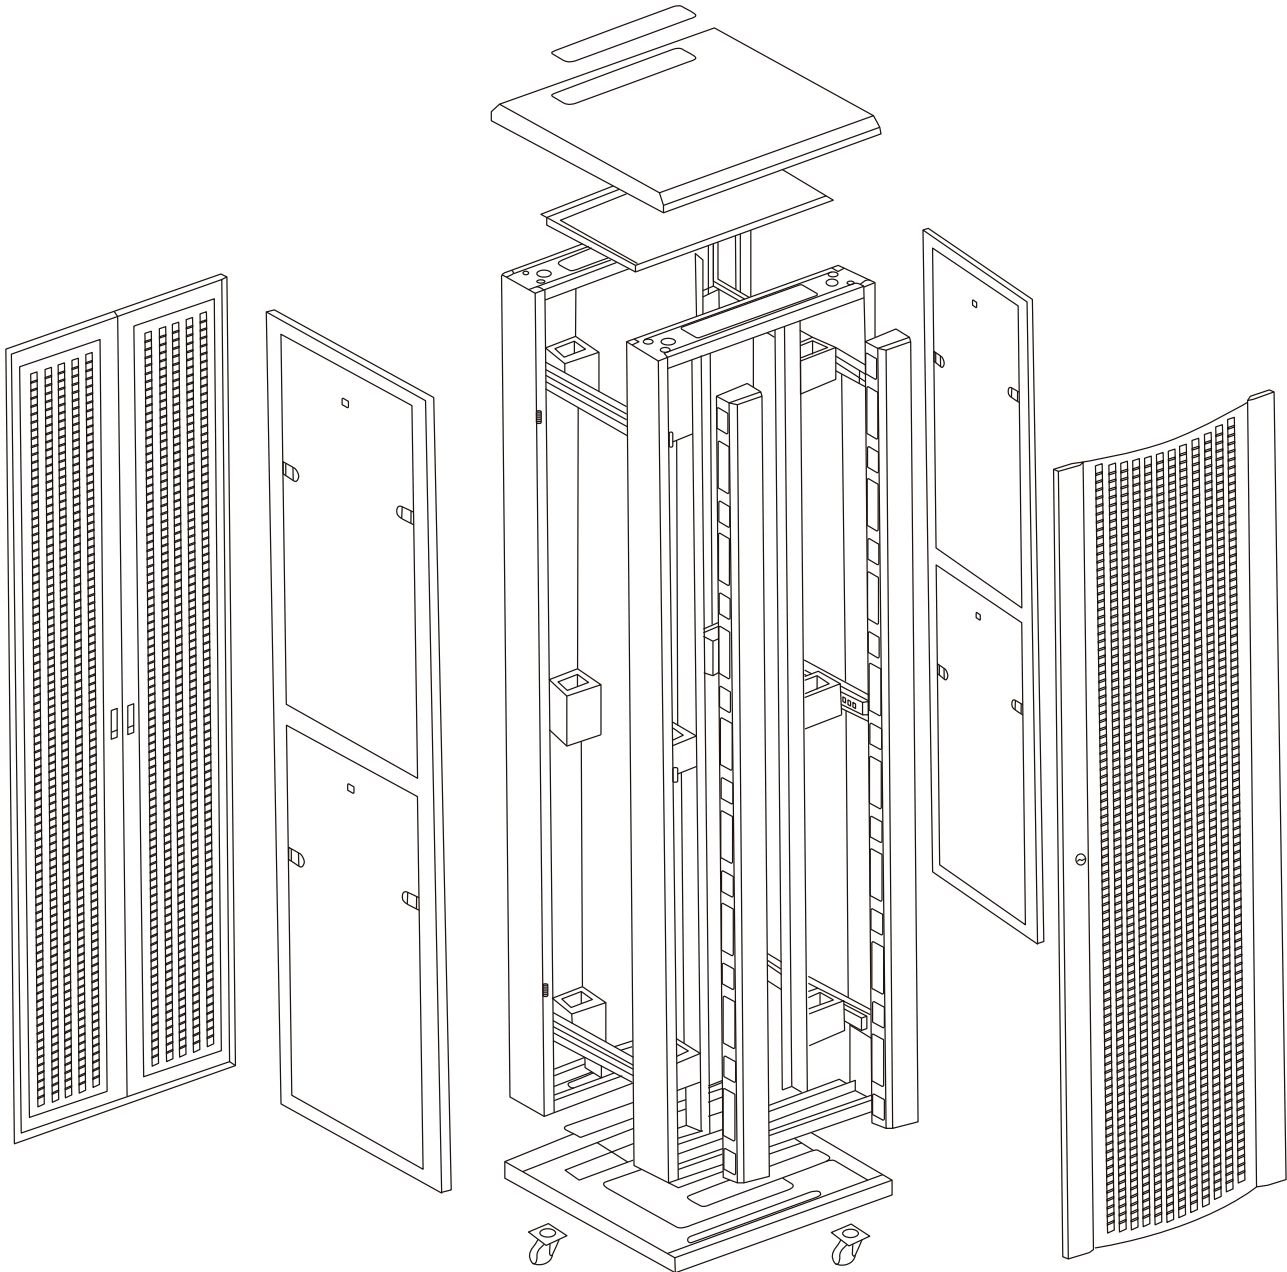

**ORDER INFORMATION**

Order Number	Width x Depth x Height	Capacity	SIZE	CBM
OM428010206	(800x1000x2055)mm (32x39x81)inch	42U	(870x1070x2085)mm (34x42x82)inch	1.9130