

## 1. Structure:

Item		Specification
<b>Conductor</b>	Cond. Diam.	0.511mm
	Construction	Solid Copper
	Size	24 AWG 4P
<b>Insulation</b>	Material	HD-PE
	Average Thickness	0.22 mm
	Diameter	0.92 mm
Twisted		Refer to structure figure
Rip Cord		
<b>Jacket</b>	Material	PE
	Average Thickness	0.5 mm
	Diameter	5.44 ± 0.2mm Black

## 2. Wire Construction:


Pair	Wire Arrangement
1P	Blue / Blue * White
2P	Orange / Orange * White
3P	Green / Green * White
4P	Brown / Brown * White

## 3. Characteristic:

1. Electrical Properties	Refer to TIA/EIA-568B.2	
2. Physical Properties		
	(1) Insulation: (unaged)	Tensile strength: 2400 psi Elongation: 300%
	(2) Jacket: (unaged)	Tensile strength: 2000 psi Elongation: 100%
	(3) Flame:	VW-1
3. Conductor Resistance	93.8 OHM/KM at 20° C Max	
Spark Test:	1750 V AC	
Dielectric Strength:	1500 V AC. 2S	
4. Center Degree:	93%	

## 4. Marking

Connection Cabling Solutions, UTP 4PR 24 AWG  
ETL FT4 VERIFIED TO TIA / EIA-568B.2 & ISO/IEC 11801  
ENHANCED CAT 5E

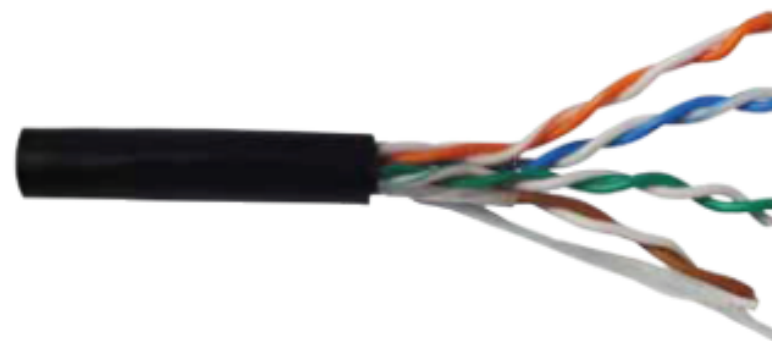

## 5. Packing



## ORDER INFORMATION

CUT-5302	Cat 5E 24AWG UTP Cable Outdoor
----------	--------------------------------